


recessed LED profile

**S01**

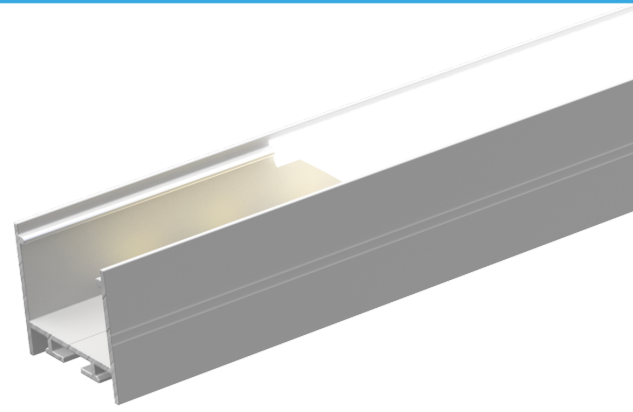

**Main features:**

- ease of obtaining a "light line"
- ability to create light compositions
- minimalistic design
- excellent heat dissipation
- designed and manufactured in the EU
- easy to install and remove the cover

**Application:**

- home and shop main lighting
- decorative and lighting installations
- for precise detail illumination


**Available colors**

-  silver anodized
-  white powder coated
-  black anodized

**Additional information**

Profile type	architectural - pendant / surface
LED strip width	max. 2x12mm or 3x8mm
Standard lengths	2020mm, 3000mm
Installation method	mounting brackets, steel slings

**Dimensions [mm]:**

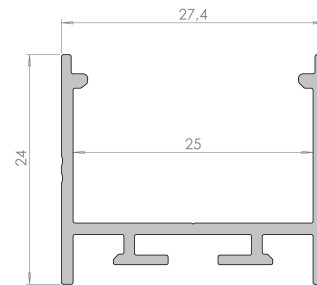

**Available accessories**


**Professional polycarbonate covers (PC) / light transmittance**



transparent / 96%

milky / 64%

**Mounting brackets**



**Profile connectors**




straight, 45 deg, 90 deg, 3x120 deg.

**Steel slings**



conductive, non-conductive


**Endcaps**



grey, black, white




Product code

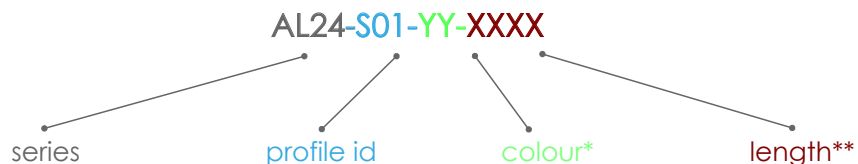

\* **AS** - silver anodized, **AB** - black anodized, **LW** - white powder coated,

\*\* **2020** - 2,02m, **3000** - 3m

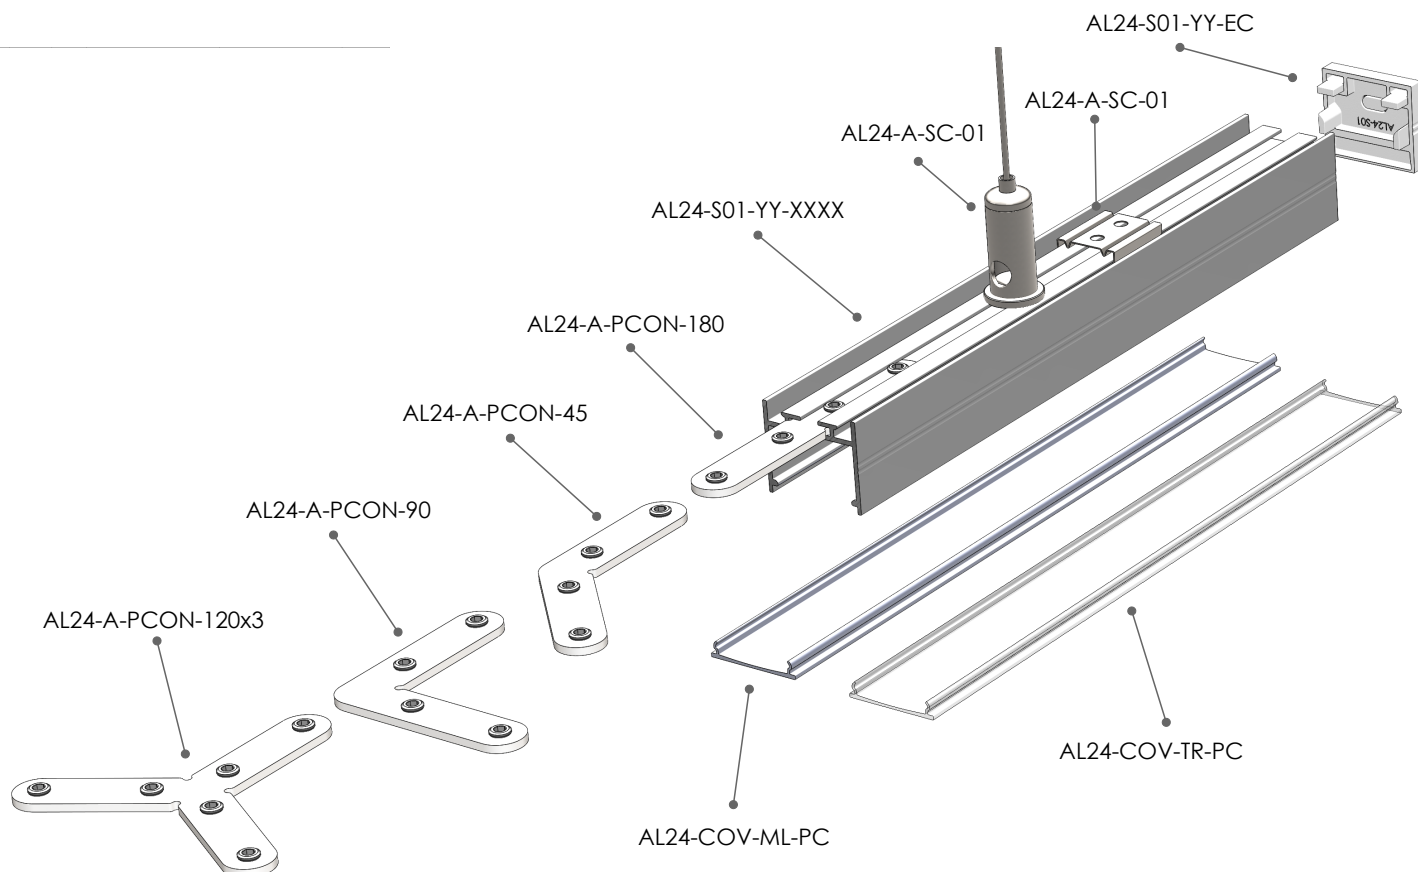

Detailed accessory list

AL24-COV-TR-PC-XXXX*	transparent cover PC	AL24-PD-1000-EL	steel sling, 1000mm - conductive
AL24-COV-ML-PC-XXXX*	milky cover PC	AL24-PD-2000	steel sling, 2000mm
AL24-S01-AS-EC	grey endcap	AL24-PD-2000-EL	steel sling, 2000mm - conductive
AL24-S01-LW-EC	white endcap	AL24-A-PCON-45	45° profile connetor
AL24-S01-AB-EC	black endcap	AL24-A-PCON-90	90° profile connetor
AL24-A-MB-01	mounting clip	AL24-A-PCON-120x3	3x120° profile connetor
AL24-PD-1000	steel sling, 1000mm	AL24-A-PCON-180	straight profile connetor

\* **2020** - 2,02m, **3000** - 3m;